



HIGHTOP GROUP



HIGHTOP GROUP

 www.hightopmachinery.com

 sales@sdhightop.com

 Huoju Industrial Park, National High-tech Zone, Jining, Shandong Province, China.



SKID STEER LOADER

www.hightopmachinery.com

Shandong Hightop Machinery Group Co, Ltd.

ABOUT US

Shandong Hightop Group is a large-scale engineering construction machinery and equipment manufacturing group integrating scientific research, production and service. Its headquarter is located in Jining City, Shandong Province, covering an area of about 133,000 sq meters and a total of more than 500 employees. Hightop group is "Specialization, Refinement, Distinctive, Novelty" honorary enterprises of Jining city, and has introduced as a key project enterprise by government of The Economic and Technological Development administrative district. The Hightop Group manufactures and sells mini excavators, skid steer loaders, lawn mowers, sprayers and other products.

Hightop Brand excavator is No 1 of market share at near 5 years in mini excavator exporting market. Hightop conducts business in Europe, North America, South America, Southeast Asia and other area of the world. Until now, Hightop brand product have been exported to more than 177 countries and regions. At the same time, Hightop has 10 overseas warehouse distribution bases in the world, including 2 in the United States, 1 in Germany, 1 in the United Kingdom, 2 in Spain, 2 in Poland, 1 in Russia, and 1 in Saudi Arabia.

Quality is the life of Hightop Group. Technological innovation is Hightop's vitality, excellence is the artisan spirit of Hightop to abide. Until now, Hightop group has obtained 28 national patents, 21 trademarks and 3 copyrights. Hightop has got ISO 9001 international quality system certification, European Union CE certification, SGS certification, Germany TUV and France BV to meet the international different market demand.

We believe the science and technology always change the world. In the future, Shandong Hightop Group will strive to build an international first-class brand of excavators and first-class enterprise, to creat contribution to society, to create value to customers, and to make happiness to the employees.



Website



WhatsApp



Tiktok



YouTube



Facebook



Contact us




CERTIFICATE OF HONOR



CONTENTS

HOT HT320T Skid Steer Loader.....	04
HTS360 Skid Steer Loader.....	06
HOT HT380T Skid Steer Loader.....	08
HTS380 Skid Steer Loader.....	10
HT380S Skid Steer Loader.....	12
HOT HTS382T Skid Steer Loader.....	14
HOT HTS430 Skid Steer Loader.....	16
HTS450 Skid Steer Loader.....	18
HOT HTS530 Skid Steer Loader.....	20
HOT HTS530T Skid Steer Loader.....	22
HOT HT-V1000 Skid Steer Loader.....	24
HOT HTS25 Skid Steer Loader.....	26
HOT HTS35 Skid Steer Loader.....	28
HOT HTS45 Skid Steer Loader.....	30
HOT HTS60 Skid Steer Loader.....	32
HTS65 Skid Steer Loader.....	33
HTS75 Skid Steer Loader.....	34
Skid Steer Loader Attachments.....	36

HT320T Skid Steer Loader

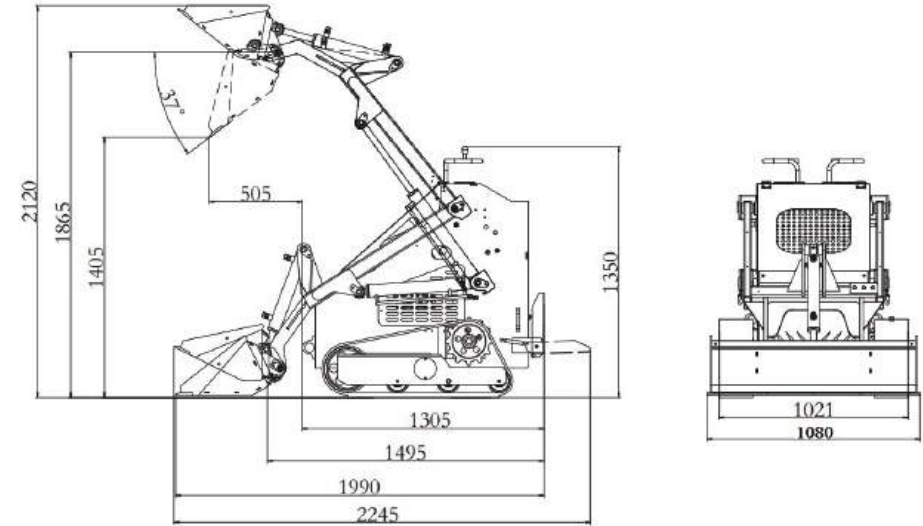

Model:HT320T				
Max working height	2120mm	Engine	RATO R420	Briggs&Stratton 13.5HP
Max pin height	1865 mm	Rated Power (KW)	9.7Kw	10Kw
Max Dumping height	1405 mm	Rotating speed (rpm)	3600rpm	3600rpm
Max Dumping distance	575mm	Noise (Db)	≤95	≤95
Max Dumping Angle	37°	Hydraulic System		
Total height	1350 mm	Pressure (Mpa)	0-17	0-17
Ground clearance	121 mm	Flow rate	0-18L	0-21.6L
Wheel base		Operating Load	250 Kg	250Kg
Overall length without bucket	1495 mm	Bucket Capacity	0.15m³	0.15m³
Total width	1021 mm	Max Lifting Force	360 Kg	360 Kg
Bucket width	1080mm	Travel Speed	0-4.5Km/h	0-4.5Km/h
Total length with bucket	2245 mm	Operating Weight	830 Kg	830 Kg
overall length without the bucket after folding the pedal.	1990 mm	Oil		
		Fuel tank	7L	7L
		Engine oil	1.7L	1.7L
		Hydraulic tank	37L	37L

HTS360 Skid Steer Loader



Model: HTS360

Power	13.5hp/10.1kw	Speed	Max 5km/h
Engine	Briggs & Stratton	Machine width	1090 - 1150mm
Load weight (kg)	320kg	Unloading height	1458mm
Bucket capacity	0.15 m ³	Bucket width	1150mm



Replace manual labor, toss out the hand tools and get more done in hard-to-access work areas. Easy-to-use mini HTS360 loader travel and work where other machines can't, making them a popular choice for landscapers, contractors, renters and others. Don't be fooled by the small size.

Top Features

Superior Performance

Attachment Versatility

Ride-On/Walk-Behind Convenience


Compact Size

Minimal Ground Disturbance

They do serious work: digging, trenching, tilling, moving material and more.



HT380T Skid Steer Loader

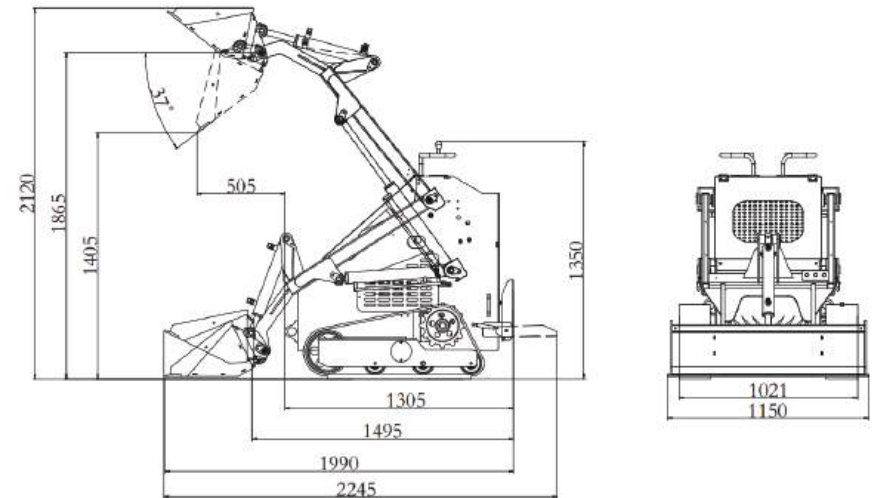

Model:HT380T				
Max working height	2120mm	Engine	RATO R740-1	Briggs&Stratton 23HP
Max pin height	1865 mm	Rated Power	16Kw	17Kw
Max Dumping height	1405 mm	Rotating speed	3600rpm	3600rpm
Max Dumping distance	575mm	Noise (Db)	≤95	≤95
Max Dumping Angle	37°	Hydraulic System		
Total height	1350 mm	Pressure (Mpa)	0-17	0-17
Ground clearance	121 mm	Flow rate	0-21.6L	0-21.6L
Wheel base		Operating Load	300 Kg	300 Kg
Overall length without bucket	1495 mm	Bucket Capacity	0.15m³	0.15m³
Total width	1021 mm	Max Lifting Force	380 Kg	380 Kg
Bucket width	1150mm	Travel Speed	0-4.5Km/h	0-4.5Km/h
Total length with bucket	2245 mm	Operating Weight	890 Kg	890 Kg
overall length without the bucket after folding the pedal.	1990 mm	Oil		
		Fuel tank	20L	20L
		Engine oil	1.7L	1.7L
		Hydraulic tank	37L	37L


HTS380 Skid Steer Loader



Model: HTS380

Max working height	2120mm	Engine	RATO R740-1	Briggs & Stratton23HP
Max pin height	1890 mm	Rated Power	16Kw	17Kw
Max Dumping height	1465 mm	Rotating speed	3600rpm	3600rpm
Max Dumping distance	485mm	Noise (Db)	≤95	≤95
Max Dumping Angle	32°	Hydraulic System		
Total height	1315 mm	Pressure (Mpa)	0-17	0-17
Ground clearance	115mm	Flow rate	0-21.6L	0-21.6L
Wheel base	680	Operating Load	300 Kg	300 Kg
Overall length without bucket	1650 mm	Bucket Capacity	0.15m³	0.15m³
Total width	1120 mm	Max Lifting Force	380 Kg	380 Kg
Bucket width	1150mm	Travel Speed	0-4.5Km/h	0-4.5Km/h
Total length with bucket	2085mm	Operating Weight	800 Kg	800 Kg
overall length without the bucket after folding the pedal.	2035 mm	Oil		
		Fuel tank	20L	20L
		Engine oil	1.7L	1.7L
		Hydraulic tank	37L	37L

HT380S Skid Steer Loader

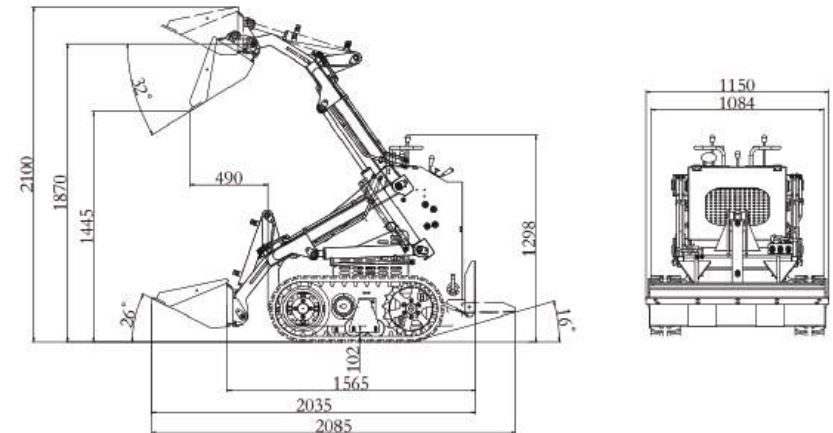


Model:HT380S

Max working height	2100mm	Engine	RATO R740-1	Briggs&Stratton 23HP
Max pin height	1870 mm	Rated Power	16Kw	17Kw
Max Dumping height	1445 mm	Rotating speed	3600rpm	3600rpm
Max Dumping distance	485mm	Noise (Db)	≤95	≤95
Max Dumping Angle	32°	Hydraulic System		
Total height	1300mm	Pressure (Mpa)	0-17	0-17
Ground clearance	100mm	Flow rate	0-21.6L	0-21.6L
Wheel base	680	Operating Load	890Kg	890 Kg
Overall length without bucket	1650 mm	Bucket Capacity	0.15m³	0.15m³
Total width	1120 mm	Max Lifting Force	380 Kg	380 Kg
Bucket width	1150mm	Travel Speed	0-4.5Km/h	0-4.5Km/h
Total length with bucket	2085mm	Operating Weight	890 Kg	890 Kg
overall length without the bucket after folding the pedal.	2035 mm	Oil		
		Fuel tank	20L	20L
		Engine oil	1.7L	1.7L
		Hydraulic tank	37L	37L



HTS382T Skid Steer Loader **HOT!**

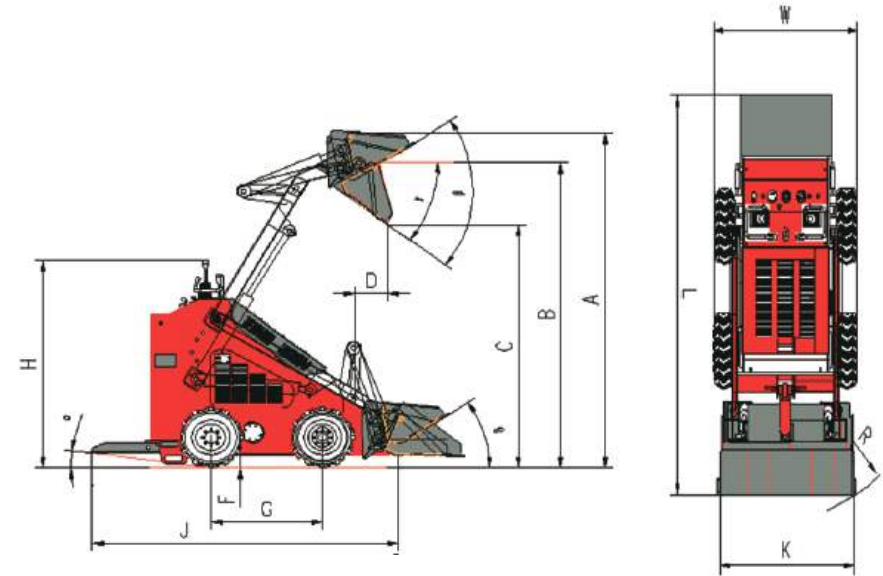

Model: HTS382T


Main Size		Performance parameter	
Maximum working height (A)	2200mm	Carrying capacity	380Kg(62% tipping load)
Maximum pin height (B)	1884mm	Bucket volume	0.15 m3
Maximum discharge height (C)	1488mm	Maximum lifting force	550KG
Maximum discharge distance (D)	348mm	Maximum lift	380 Kg
Bucket swing Angle (β)	55°	speed	0-5.5 Km/h
Bucket discharge Angle (γ)	30°	Operating weight	860Kg
Suction Angle (θ)	25°	Tractive effort	No load: 520KG
Departure Angle (α)	11°	Angle of climb	17degree
Total height (H)	1280mm	Service time (full oil)	3-4h
Ground height (F)	100mm	Engine	
Wheelbase (G)	860mm	Rated power (KW)	19.2KW(26HP) (Runtong brand)
No bucket length (J)	1780mm	Rated speed (rpm)	3600
Total width (W)	1200mm	Noise (Db)	≤95
Bucket width (K)	1190mm	Fuel tank volume(L)	28 L
Total length (L)(with bucket)	2500mm	Hydraulic tank volume(L)	20 L
Front turning radius (R)	1307mm	Hydraulic system	
Working hours		System Pressure	17MPa=170bar=2465psi
lift(S)	4.27	Standard flow	25L/min
load(S)	1.34	Traveling pump flow	22L/min 36L/min
landing(S)	3.31	Replenishment pump flow	10L/min 13L/min
Tyre type		Working system	44L/min 44L/min
Herringbone engineered tire	18*8.5-8		

■ HTS430 Crawler Skid Steer Loader



Model: HTS430			
Machine weight	830kg	Number of valves	3
Load weight (kg)	200kg	Bucket capacity	0.15 m ³
Max lifting power	380kg(10 cm from the ground)	Standard Tires	18*8.5-8
Engine	Briggs & Stratton/Euro 5 3864/18.2kw/23HP (Optional HONDA HGX690 16.5kw/22.1HP)	Speed	Max. 5.5km/h
Pump flow rate	Big flow 55L/min	Hydraulic pressure	17Mpa
Number of pumps	3	Cycle time	Raise :4.27s, Dump:1.34s , Lower 3.31s
Main Valve	Itlay Brand		

■ HTS430 Wheel Skid Steer Loader

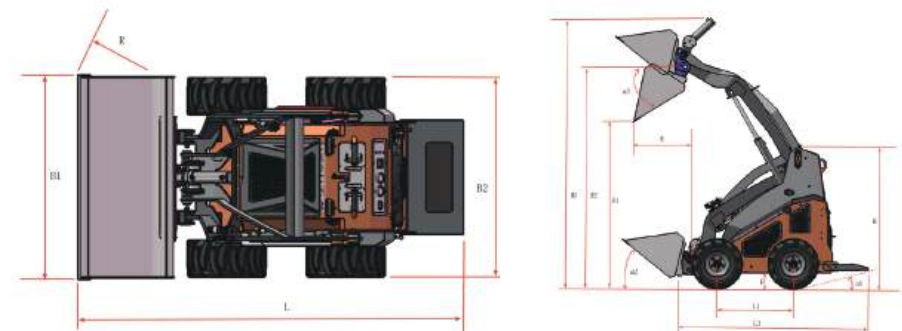


■ HTS450 Skid Steer Loader



Model: HTS450			
Max working height (H3)	97.4 inch	Engine	
Max pin height (H2)	77.83 inch	Rated Power (KW)	18.2KW(23HP)
Max Dumping height (H1)	50.2 inch	Rotating speed (rpm)	3600
Max Dumping distance(E)	6.89 inch	Noise (Db)	≤95
Max Dumping Angle (a3)	70°	Hydraulic System	
Rollback of bucket on ground (a2)	25°	Pressure (Mpa)	17
Departure angle (a1)	23°	Working Time (s)	
Total height (H)	51.18 inch	Raise	4
Ground clearance (F)	4.72inch	Dump	1.3
Wheel base (L1)	35.04 inch	Lower	3.2
Overall length without bucket (L3)	69.57 inch	Operating Load	390 Kg
Total width (B2)	40.55 inch	Bucket Capacity	0.13 m³
Bucket width (B1)	42.13 inch	Max Lifting Force	450 Kg
Total length with bucket (L)	91.3 inch	Travel Speed	0-4.5Km/h
Turn radius forward turning (R)	56.69 inch	Operating Weight	960 Kg
overall length without the bucket after folding the pedal. (L2)	64.29 inch		

HTS530 Skid Steer Loader

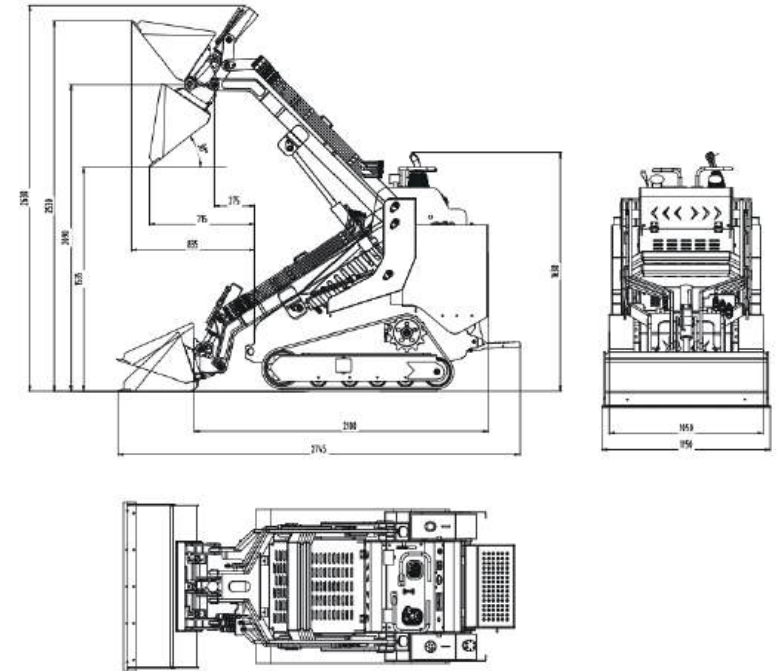

Model: HTS530			
Max working height	2630mm	Engine	Kubota D1105
Max pin height	2090 mm	Rated Power (KW)	14KW
Max Dumping height	1535 mm	Rotating speed (rpm)	2200
Max Dumping distance	715mm	Noise (Db)	≤93
Max Dumping Angle	38°	Hydraulic System	
Total height	1630 mm	Pressure (Mpa)	0-17
Ground clearance	150 mm	Flow rate	0-32L
Wheel base		Operating Load	450 Kg
Overall length without bucket	2220 mm	Bucket Capacity	0.2m³
Total width	1050 mm	Max Lifting Force	530 Kg
Bucket width	1150mm	Travel Speed	0-4.5Km/h
Total length with bucket	2745 mm	Operating Weight	1330 Kg
overall length without the bucket after folding the pedal.	2100 mm	Oil	
		Fuel tank	30L
		Engine oil	4L
		Hydraulic tank	35L


HTS530T Skid Steer Loader **HOT!**



Model: HTS530T

Max working height	2420mm	Engine	RATO R740
Max pin height	2085 mm	Rated Power	17KW
Max Dumping height	1580mm	Rotating speed	3600rpm
Max Dumping distance	755mm	Noise	≤95Db
Max Dumping Angle	29°	Hydraulic System	
Total height	1630 mm	Pressure	0-17Mpa
Ground clearance	150 mm	Flow rate	0-36L
Wheel base		Operating Load	380 Kg
Overall length without bucket	2220 mm	Bucket Capacity	0.2m³
Total width	1070 mm	Max Lifting Force	500 Kg
Bucket width	1150mm	Travel Speed	0-4.5Km/h
Total length with bucket	2725 mm	Oil Fuel tank	30L
overall length without the bucket after folding the pedal.	2055 mm	Oil Engine oil	1.5L
		Oil Hydraulic tank	35L

HT-V1000 Skid Steer Loader

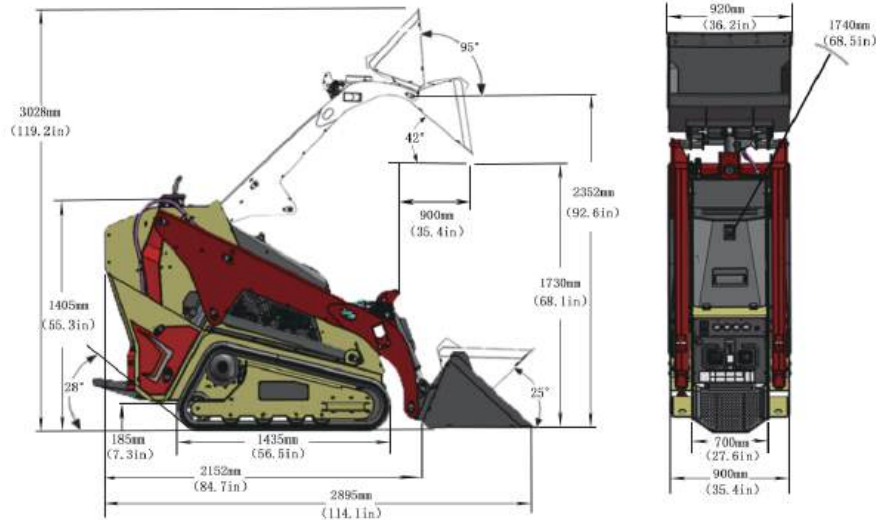


Model: HT-V1000

Key Specifications	Rated Power (KW)	18.4(25Hp)
	Operating Weight	1538 Kg
	Rated Operating Capacity	454 kg
	Ground Pressure (Rubber)	2800 Kg/m ²
	Auxiliary Std Flow	45 L/Min
	Rotating speed (Rpm)	2800
	Noise (Db)	≤95
Engine	Emissions Tier	EU NRM 97/68/EC Stage 5 EPA Tier 4 Final
	Engine Cooling	Liquid
	Engine Fuel	Diesel
	Displacement	1.131 L
	Number of Cylinders	3
Performance	Tipping Load	1315 KG
	Travel Speed	5.8 Km/h
	Travel Speed - Reverse	3.9 Km/h
Capacities	Fuel Tank	25 L
Hydraulic System	Hydraulic oil tank capacity	22 L
	Pump Capacity	45 L/ Min
	System Relief @ Quick Couplers	200 Bar

■ HTS25 Wheel Skid Steer Loader

HOT!

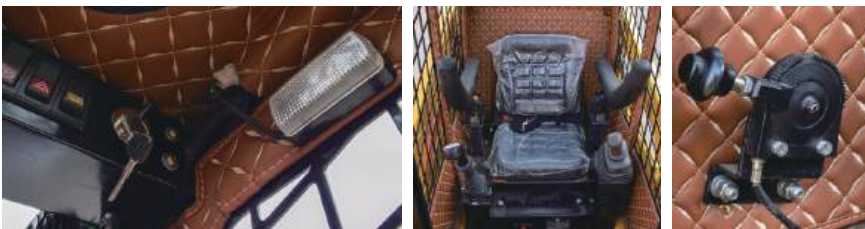

■ HTS25 Crawler Skid Steer Loader

HOT!



Model: HTS25			
Operating load	380 kg	Overall operating height	3400 mm
Rated flux	50 L/min	Height to top of cab	1813mm
Tire(track)model	6.5-10	Dumping height	2000mm
Rated power	Kubota 25hp/2800rpm	Bucket width	920 mm
Fuel tank capacity	28L	Dumping reach	441mm
Machine Weight	1300 kg	Tread width	785mm
Bucket capacity	0.2 m ³		

HTS35 Skid Steer Loader



Model: HTS35			
Height at maximum extension	3300mm	Rated operating capacity	500kg
Height to bucket hinge pin	2725mm	Tipping load	1000kg
Width with bucket	1400mm	Bucket capacity	0.3m³
Track width	1080mm	Operating weight	2200kg
Wheelbase	897mm	Max. travel speed	10km/h
Ground clearance	140mm	Hydraulic pump flow	60L/min
Dump angle	40°	Fuel tank capacity	60L
Dumping height	2050mm	Tires	8.5-15
Maximum reach	790mm	Overall dimensions	2950×1350×2000mm
Angle of departure	20°		
Engine Maker/Model	Xin Chai 490		
Net power	37Kw/2500rpm		
Type	4Cylinder in-line, Water cooled, 4 stroke, Diesel engine		
Standard	Standard bucket	Standard	Preheat starting assist system for extreme cold weather
	Open cab		Cab fitted with a heater as standard
	Hydraulic joystick controls		Air conditioner
	Auxiliary hydraulic couplers		

HTS45 Skid Steer Loader



Model: HTS45			
Operating load	700 kg	Overall operating height	3980 mm
Rated flux	62.5 L/min	Height to top of cab	2140mm
Tire(track)model	10-16.5	Dumping height	2380mm
Rated power	China Xinchai 37 Kw Euro 5	Bucket width	1740 mm
Fuel tank capacity	70L	Dumping reach	700mm
Machine Weight	2700 kg	Tread width	1450mm
Bucket capacity	0.4 m ³		

■ HTS60 Skid Steer Loader



Model:HTS60

Operating load	700 kg	Overall operating height	3350 mm
Rated flux	60 L/min	Height to top of cab	2050mm
Tire(track)model	300X52.5	Dumping height	2100mm
Rated power	China Xinchai 36Kw Euro 5	Bucket width	1500 mm
Fuel tank capacity	50L	Dumping reach	790mm
Machine Weight	2800 kg	Tread width	1102mm
Bucket capacity	0.3 m ³		

■ HTS65 Skid Steer Loader



Model:HTS65

Operating load	700 kg	Overall operating height	3350 mm
Rated flux	60 L/min	Height to top of cab	2050mm
Tire(track)model	300X52.5	Dumping height	2100mm
Rated power	China Xinchai 36Kw Euro 5	Bucket width	1500 mm
Fuel tank capacity	50L	Dumping reach	790mm
Machine Weight	2800 kg	Tread width	1102mm
Bucket capacity	0.3 m ³		

HTS75 Skid Steer Loader



Model: HTS75

Operating load	1050kg	Overall operating height	4070mm
Rated flux	75L/min	Height to top of cab	2160mm
Wheel model	12-16.5	Dumping height	2450mm
Rated power	China Xinchai 55Kw Euro 5	Bucket width	1880mm
Fuel tank capacity	75L	Dumping reach	700mm
Machine Weight	3500kg	Tread width	1500mm
Bucket capacity	0.5 m ³		

Attachments for Mini Steer Loader



Sweeper/Gutter Brush



Water Kit



Advancing Sweeper



Breaker



Spreader



Auger



Bit



Tree Spade



Planer



Road Cutting Saw



Wheel Saw



Guardrail Cleaner



Landscape Rake



Stone screening machine



Double Trencher



Rock Bucket



Blower



Guardrail translation machine



Stabilized soil mixer



Angle Broom



Dozer Blade



Dozer Blade



Ditch Compactor



Lawn paver



Electric Control Angle Broom



Snow Blower



High throwing snow tube



Scraper



Manhole Cover Milling Machine



Plate Compactor



Floor hammer



Hydraulic shear



Snow Blade



Snow Bucket



Snow V-Blade



Drum ice machine



Hedge Trimmer



Multi-Function



Cattle in bed Ripper



Dung pushing device



Soft Clamp



Fork Clamp



Haystack Reclamation Machine



Utility Fork



Simple manure pushing machine



Seeder



Forest Mulcher



4 in 1 Bucket



Grapple Rake



Heavy Grass Fork



Grapple Bucket



Brush Cutter



Bale Fork



Digger



Stump Grinder



Ripper



Soil Tiller



Steel Tracks



Tyre protection chain



Rubber track outside tire



Mower



Brush Cutter



Tree Saw



High speed tree saw



Closed Bucket



Side dump bucket



Pallet Fork



Side Shift Pallet Fork



Land Plane



Tree Puller



Standard Bucket



Curved bucket



Bucket Mixer



Backhoe Arm



Swing Backhoe Arm



Backhoe



Flat clamp



Rock Bucket Grapple



Vibratory Roller



Grader



Floor Grinder



Pile Driver



Rear Support



Multi section crane



High Dump Bucket



Hydraulic winch



Tilt-TatchTM



Automatic quick change rack



Beach cleaner



Mixer



Sling